

RoHS

ORDERING INFORMATION:

3001WRS(C)-2\* \*P-\*

Part No

2 : Double Row

Circuit No

PIN  
:Matte-Tin Plated  
G:Gold Flash

FITTING NAIL  
Matte-Tin Plated  
Matte-Tin Plated

WAFER(90°)

Part No:

Material:Pin:Brass Matte-Tin Plated

Base:LCP UL94-V0,Black

Circuits:2-24

Contact Resistance:10mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding Voltage:1500V AC/minute


Current Rating:5A AC,DC

Voltage Rating:250V AC,DC

Temperature Range:-25°C ~+85°C

Dimensions

circuit	A	B	C	circuit	A	B	C
2*1	- -	6.70	11.20	2*7	18.00	24.70	29.20
2*2	3.00	9.70	14.20	2*8	21.00	27.70	32.20
2*3	6.00	12.70	17.20	2*9	24.00	30.70	35.20
2*4	9.00	15.70	20.20	2*10	27.00	33.70	38.20
2*5	12.00	18.70	23.20	2*11	30.00	36.70	41.20
2*6	15.00	21.70	26.20	2*12	33.00	39.70	44.20

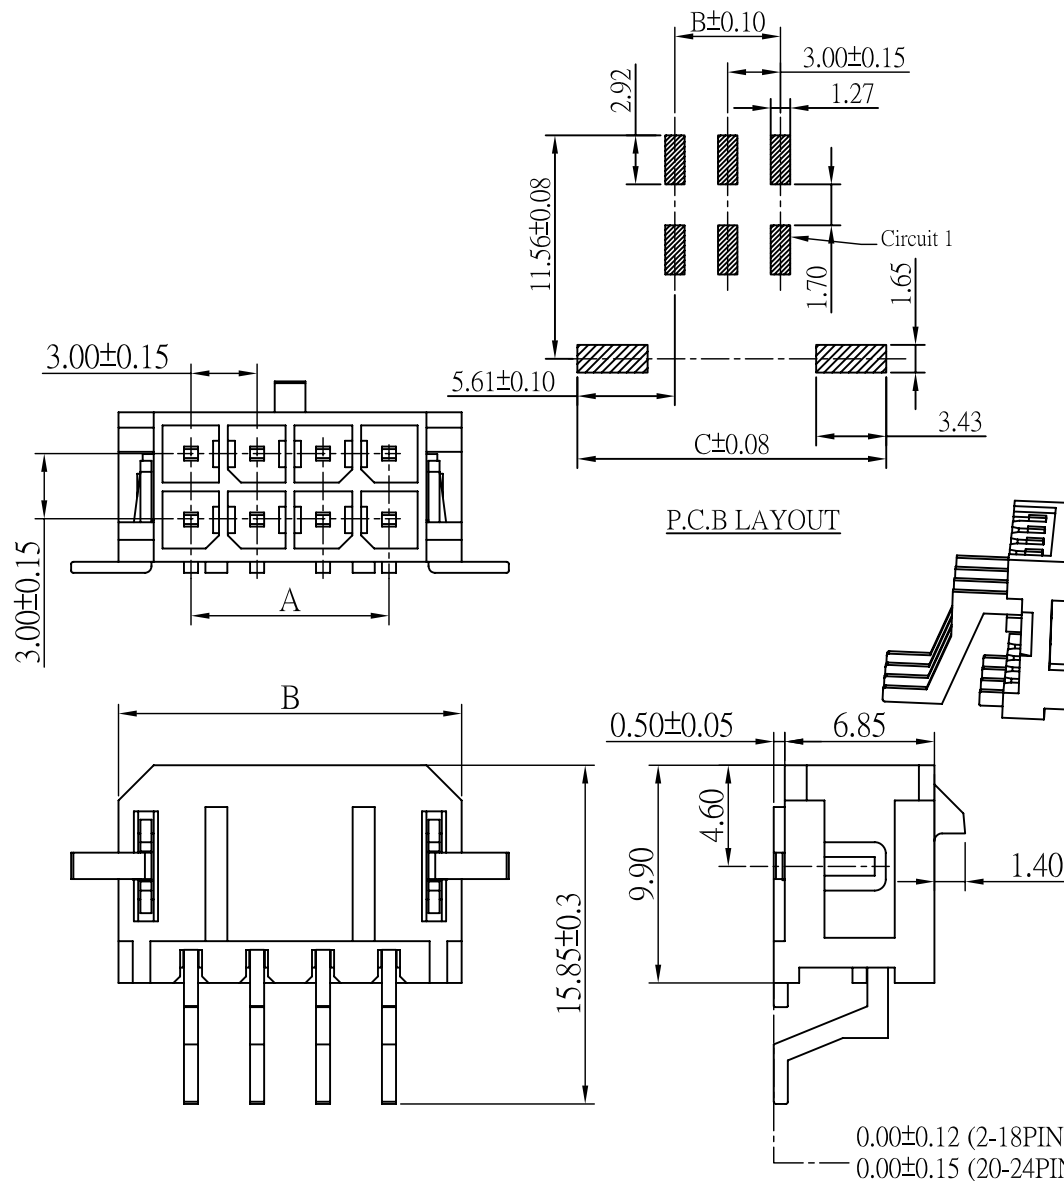

深圳市宇联盛电子有限公司

UNIT:MM

繪圖  
DRAWING:

张朋

比例 (SCALE):

3:1

名稱 (TITLE):


MX3.0 90° SMT

存檔名稱 (FILE):

3001WRS(C)-2

日期 (DATE):

PROJECTION:



DESCRIPTION: MX3.0 MICRO-FIT D/R SMT W90° 貼片

ANGLE  
±2°

DIM:  
.X±0.50  
.XX±0.25  
.XXX±0.10

審核  
CHECKED BY

核准  
APPROVAL BY

PART NO: 3001WRS(C)-2

REV:A3